


# L225C3-L

- Application** Interior directional light for wall, picture or signage illumination.
- IP Rating** 20
- Mounting** Retrofit to existing standard octagonal box using custom mounting plate.  
\* See installation sheet.
- Electrical** 13W
- Power Supply** Powered by remote dimmable/ non-dimmable driver (sold separately).  
\*See website for recommended drivers  
\*Remote emergency driver / inverter options available. Consult factory.
- Power Consumption** 13.0 Watt
- Light Output** 13.0 Watt, 700~731lm
- Warranty** 5 years limited warranty  
Estimated useful life of LED is 50,000 hours.
- Material** Solid anodized aluminum . RoHS compliant.
- Weight** -
- Approval** 


Type:

Project:

Modified:

Quantity:

Notes:

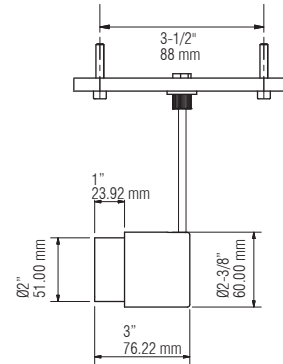

## Order Guide

Example: L225-C3-L-13-W30S-S-FS-MA-2-MA

Code	Mount	Size	Wattage	Color	Beam	Accessories	Accessory Finish	Stem	Finish
<b>L225</b>	<b>C3</b>	<b>L</b>	<b>13</b>						
	<b>C3</b> = 04-5/8" x 1/4" canopy	<b>L</b> = large	<b>13</b> = 13W	<b>W27S</b> = 2700K, 80+CRI <b>W30S</b> = 3000K, 80+CRI <b>W35S</b> = 3500K, 80+CRI <b>HD</b> = halogen dim, 95+CRI (2800~1900K)	<b>S</b> = spot (12°) <b>N</b> = narrow flood (30°)	<b>FS</b> = full shroud	<b>MA</b> = matte clear anodized <b>BA</b> = black anodized	<b>2</b> = 2" (51mm) <b>X</b> = custom	<b>MA</b> = matte clear anodized <b>BA</b> = black anodized <b>WH</b> = white powder coating


**PHOTOMETRIC DATA:**

**13W, 3000K, 80+CRI, 19°**

**Polar Candela Distribution**

**Illuminance at a Distance**

Lumen: 700 lm



	Center Beam FC	Beam Width
3.0'	331	1.0' (305mm)
6.0'	82.9	2.0' (609mm)
9.0'	36.8	3.1' (945mm)
12.0'	20.7	4.1' (1250mm)
15.0'	13.3	5.1' (1554mm)
18.0'	9.21	6.1' (1859mm)


0° Spread: 19.4°

**13W, 3000K, 80+CRI, 30°**

**Polar Candela Distribution**

**Illuminance at a Distance**

Lumen: 731 lm



	Center Beam FC	Beam Width
3.0'	206	1.6' (487mm)
6.0'	51.4	3.1' (945mm)
9.0'	22.8	4.7' (1432mm)
12'	12.8	6.3' (1920mm)
15'	8.22	7.9' (2407mm)
18'	5.71	9.4' (2865mm)

0° Spread: 29.4°