

Specification Sheet


LED12W350iB with Enclosure

LED12W350i


CONSTANT CURRENT OUTPUT LED DRIVER



Dimension:

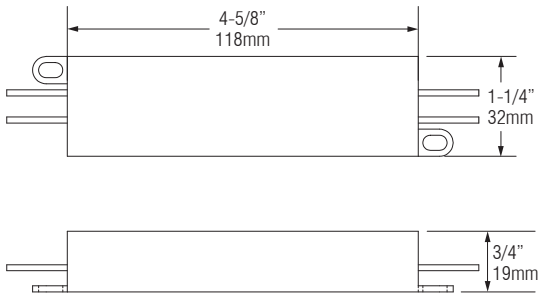

Driver Diagram:

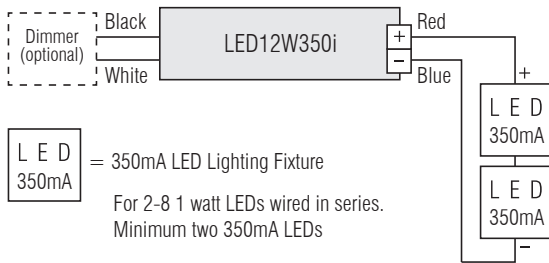

Features:

- Protection: Short circuit and overload protection
- Over Temperature Protection
- EMC: Meets FCC47 CFR Part 15 (Class B) Consumer Limits
- Type 1 Outdoor, suitable for dry and damp locations.

AC Input Voltage:	120 VAC ± 10% Dedicated. 50/60Hz
DC Output Voltage:	6 ~ 32 VDC
DC Output Current:	350mA Constant
Output Wattage:	12W Max
Short Circuit Protection:	Yes
Overload Protection:	Yes
Thermal Protection:	Yes
Dimming Function:	Dimmable with ELV dimmer (trailing edge)
Temperature Range:	-30° ~ 60°C
Case Material:	Polycarbonate
Weight:	0.33lbs (150g).
Approval:	UL



Note: Consult factory for maximum wiring length.

Caution: Do not install on-off switch at the output (load) side of a constant current LED driver as it will damage the fixture(s).
 Warranty will be void on both driver and fixture(s).

***USE WITH EBX-160-ZP ENCLOSURE**

ORDER CODE	ENCLOSURE
LED12W350i	B

B = drive enclosure
 (6-1/4" x 5" x 2")

[Project]

[Quantity]

[Notes]



t 604.708.1184 f 604.708.1185 www.mplighting.com
 16 West 4th Avenue, Vancouver BC, Canada, V5Y 1G3