

Low Voltage Single Rail

X01SR

SPEC SHEET



Material: Machined aluminum with electroplated finish.

Sec. Voltage: 12V (fixture).

Mounting: Rotatable and easy to position. Designed for use on MP single rail (SR) system (sold separately).


Shade: Sold separately.

Stem: Available in 1" (25mm) increments. Maximum length 96" (2438mm).

Accessories: Sold separately.

Lamp (not included): MR16, 50W Max. Covered glass recommended. (Note: GE constant color lamp cannot be used with glass shade.) For use with LED type MR16 check lamp manufacture for specification and compatibility.

Approval: Dry locations. Approved to US and Canadian standards by CSA.

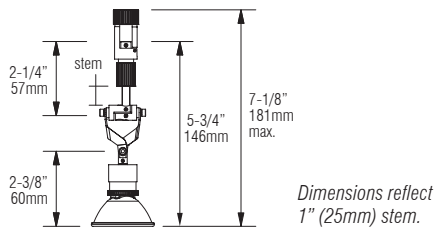

Type:

Project:

Modified:

Quantity:

Notes:



cap



metal/glass cone



arc



shroud



louver



filter/spreader

| CODE | MOUNT | SHADE* | STEM | ACCESSORIES** | FINISH |
|------------|------------------|---|--|---|--|
| X01 | SR | | | | |
| | SR = single rail | NS = no shade SC = solid metal cap SCB = solid metal cap, black PC = perforated metal cap PCB = perforated metal cap, black SM = solid metal cone SMB = solid metal cone, black PM = perforated metal cone PMB = perforated metal cone, black FR = frosted glass cone AM = amber glass cone BL = blue glass cone MA = mesh arc | 1 = 1" (25mm) X = custom length | NA = no accessory SH = metal shroud SHB = metal shroud, black ELB = eggcrate louver, black BE = beam elongator CS = crystal spreader IR = infrared filter MS = mistlite spreader UV = ultraviolet filter LSB = long shroud, black LH = accessory holder*** | MC = matte chrome BN = brushed nickel |

**Can select multiple items. Please specify.

***Accessory holder required with accessories.

[✓] MPLIGHTING®

t 1.877.708.1184 f 604.708.1185 www.mplighting.com
16 West 4th Avenue, Vancouver BC V5Y 1G3, Canada

***Note:** Shades are not recommended with LED lamps.