Shown as SR (single rail) mount with SH (metal shroud) accessory.

Copyright 2011 © MP Lighting

[✓] MPLIGHTING®

www.mplighting.com 1 877 708 1184

L222

6W Spotlight

L222

Application: Indoor directional light for wall, picture, or signage illumination.

Source: 6 x 1W, 350mA LEDs

Driver: Remote 120V primary, 350mA 12V AC or 24V DC driver (not included).

LED Input Voltage: 12V AC or 24V DC

Power Consumption: 8W

Recommended Driver: (not included)
12V AC- 12V maganetic transformer. Dimming available. Consult factory.
24V DC- TLDAV100W24V. Dimmable with dimming controller, 0~10V dimming. Consult factory.

Weight: 0.77lbs (0.351kg).

Material: Anodized aluminum. RoHS compliant.

Mounting: C1C & C2C mount to custom 2" x 2" octagonal box (included). C1M & C2M retrofit to existing standard octagonal box using custom mounting plate (included). C3 & C4 mount to standard octagonal box (not included). Can mount to 12V or 24V MP Lighting DC, SR and SF rail systems as well as the MP Lighting 3-Circuit Track (sold separately). Also available with 1-Circuit Track adaptor.

Accessories: Multiple accessories can be selected, up to two lenses and a shroud (sold separately).

Approval: Dry locations. Approved to US and Canadian standards by CSA.

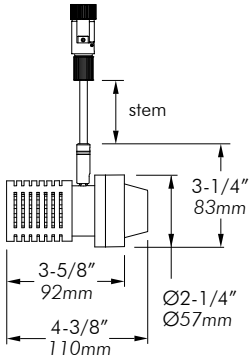

Shown as SR (single rail) mount with SH (metal shroud) accessory.

Mounting options

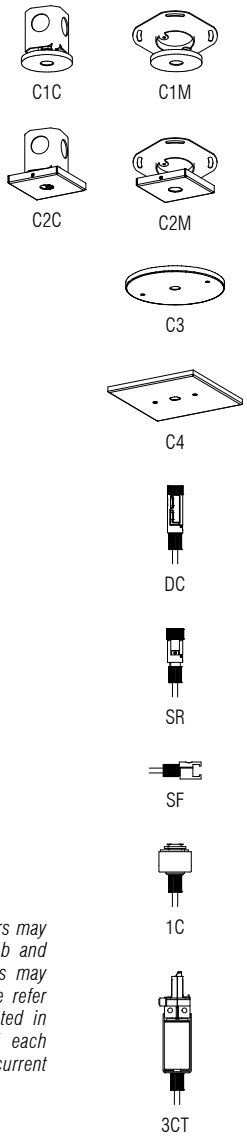

L222
25°
3000K Std
299 lm

Lumen test results provided by MP Lighting integrating sphere

Polar Candela Distribution



Illuminance at a Distance

	Center Beam FC	Beam Width	
1.5′	411.79	0.9′	09′
3.0′	102.95	1.9′	1.9′
4.5′	45.75	2.8′	2.8′
6.0′	25.74	3.7′	3.7′
7.5′	16.47	4.7′	4.6′
9.0′	11.44	5.6′	5.6′

0° Spread: 34.5° 90° Spread: 34.4°

Note: *Various operating factors may cause differences between lab and field results. As specifications may change without notice, please refer to the LED Lamp Index located in the "Downloads" section of each product webpage for the most current information.*

CODE	MOUNT	TRACK TYPE (1C ONLY)		COLOR	STEM	ACCESSORIES*	INPUT VOLTAGE		FIXTURE FINISH	ADAPTOR FINISH (1C ONLY)
L222			-					-	M	

C1C = Ø2-3/8" x 1/4" canopy w/ custom octagonal box
C1M = Ø2-3/8" x 1/4" canopy w/ retrofit mounting plate
C2C = 2-5/8" Sq. x 3/8" canopy w/ custom octagonal box
C2M = 2-5/8" Sq. x 3/8" canopy w/ retrofit mounting plate
C3 = Ø4-5/8" x 1/4" canopy
C4 = 4-5/8" Sq. x 1/4" canopy
DC = dual circuit
SR = single rail
SF = single rail flush wall
1C = 1 circuit track
3CT = 3 circuit track (silver adaptor finish)

L = Lightolier
H = Halo
J = Juno
2 = 2-wire

27S = 2700K, std CRI
30S = 3000K, std CRI
35S = 3500K, std CRI
41S = 4100K, std CRI
20H = 2000K, high CRI
30H = 3000K, high CRI

NOTE: *Standard CRI has a value of 75~82 while high CRI has 92.*

W20H has consistent binning that falls within 1.5 MacAdam ellipse.

2 = 2" (51mm)
X = custom length

NA = no accessory
BE = beam elongator
CS = crystal spreader
MS = mistlite spreader
ELB = eggcrate louver, black
SH = metal shroud
SHB = metal shroud, black

1A = 12V AC
2D = 24V DC

M = matte clear anodized

W = white
B = black

*Accessories**

Shroud *Louver* *Elongator/ Spreader*

**Multiple accessories can be selected.*

MP LIGHTING®

t 1.877.708.1184 f 604.708.1185 www.mplighting.com
16 West 4th Avenue, Vancouver BC V5Y 1G3, Canada

Copyright © MP Lighting. All technical information in this document is subject to change.