

Electronic Fluorescent Ballast

TFLDLVE18

SPEC SHEET

Features:

- UL Class P, compact size that maximizes design flexibility.
- Multiple voltage from 120 to 277 volts.
- High performance electronic CFL ballast family, for 4-pin Lamps.
- Preheat soft start, low inrush.
- Protection against defective or no lamp.


AC Input Voltage:	120 ~ 277V, 50/60Hz
Rated Lamp Watts:	18 ~ 21W
Minimum Start Temperature:	-18°C (0°F)
AC Input Current:	0.17 ~ 0.33A
Input Power (ANSI Watts):	19 ~ 40W
Ballast Factor:	0.90 ~ 1.05
Maximum THD:	9% ~ 15%
Power Factor:	0.97 ~ 0.99
Case Material:	White Steel Casing
Approval:	Approved to UL by CSA/CUS UL Listed



Note: Consult factory for wiring length and details.

ORDER CODE

TFLDLVE18

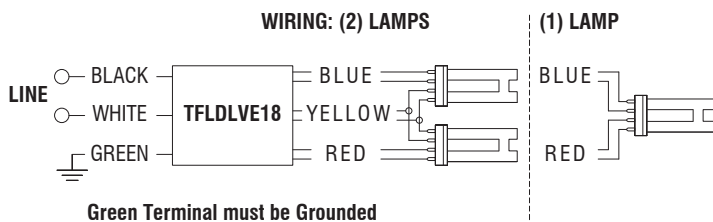

Green Terminal must be Grounded

The above diagram shows wiring for 18W/GX24Q.

[Project]

[Quantity]

[Notes]



t 604.708.1184 f 604.708.1185 www.mplighting.com
16 West 4th Avenue, Vancouver BC V5Y 1G3, Canada