
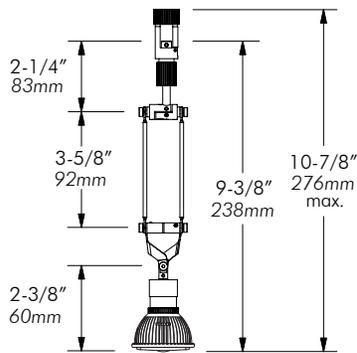


Low Voltage Single Rail

X11SR

SPEC SHEET



Dimensions reflect 1" (25mm) stem.

Material: Machined aluminum with electroplated finish.

Sec. Voltage: 12V (fixture).

Mounting: Rotatable and easy to position. Designed for use on MP single rail (SR) system (sold separately).

Shade: Sold separately.

Stem: Available in 1" (25mm) increments. Maximum length 96" (2438mm).

Accessories: Sold separately.

Lamp (not included): 7W 3000K, LED (equivalent to a 20W MR16). MR16, 50W Max. Covered glass recommended. (Note: GE constant color lamp cannot be used with glass shade.)

Approval: Dry locations. Approved to UL standards by CSA/US.



Type:

Project:

Modified:

Quantity:

Notes:



cap



metal/glass cone



arc



shroud



louver



filter/spreader

CODE	MOUNT	SHADE	STEM	ACCESSORIES*	FINISH
X11	SR				

SR = single rail

- NS = no shade
- SC = solid metal cap
- SCB = solid metal cap, black
- PC = perforated metal cap
- PCB = perforated metal cap, black
- SM = solid metal cone
- SMB = solid metal cone, black
- PM = perforated metal cone
- PMB = perforated metal cone, black
- CL = clear glass cone
- FR = frosted glass cone
- AM = amber glass cone
- BL = blue glass cone
- NP = ceramic cone, no pattern
- SP = ceramic cone, strip pattern
- MA = mesh arc
- TA = translucent arc

- 1 = 1" (25mm)
- X = custom length

- NA = no accessory
- SH = metal shroud
- SHB = metal shroud, black
- ELB = eggcrate louver, black
- BE = beam elongator
- CS = crystal spreader
- IR = infrared filter
- MS = mistlite spreader
- UV = ultraviolet filter

- MC = matte chrome
- BN = brushed nickel

*Can select multiple items. Please specify.



t 604.708.1184 f 604.708.1185 www.mplighting.com
16 West 4th Avenue, Vancouver BC V5Y 1G3, Canada