

Type:

Project:

Modified:

Quantity:

Notes:

DISCLAIMER - When using a control system, consult dimming system manufacturer with minimum load before installing 12V AC transformer. Malfunction and damage to product due to improper dimming system installation or misuse will not be covered under warranty. Only DC Drivers are recommended for dimming systems. Consult MP Lighting for recommended drivers.

*MP Lighting reserves the right, at its sole discretion, at any time and without notice, to make design changes to any of our products.

Order Guide

Example: L225-C3-L--13-W30S-S-FS-MA-2-MA


Code	Mount	Size	Wattage	Color	Beam	Shroud	Accessory Finish	Stem	Finish
L225	C3	L	13			FS			
	C3 = Ø4-5/8" x 1/4" canopy	L = large	13 = 13.0W	W27S = 2700K, 80+CRI W30S = 3000K, 80+CRI W35S = 3500K, 80+CRI W27V = 2700K, 97+CRI W30V = 3000K, 97+CRI HD = halogen dim, 95+CRI (2900K-1900K)	S = spot (12°) N = narrow flood (30°)	FS = full shroud	MA = matte clear anodized BA = black anodized	2 = 2" (51mm) X = custom	MA = matte clear anodized BA = black anodized WH = white powder coating

** Very high CRI (97+) is 2-step MacAdam COB

L225C3-L

- Application** Interior directional light for wall, picture or signage illumination.
- IP Rating** 20
- Mounting** Retrofit to existing standard octagonal box using custom mounting plate.
- Electrical** 13W
Powered by remote dimmable/ non-dimmable driver (sold separately).
**See website for recommended drivers*
**Remote emergency driver / inverter options available. Consult factory.*
- Power Consumption** 13.0 Watt
- Light Output** 13.0 Watt, 1430lm
**For photometric data, see page 02*
- Warranty** 5 years limited warranty
Estimated useful life of LED is 50,000 hours.
- Material** Anodized aluminum. RoHS compliant.
- Weight** -
- Approval**

Dimension:

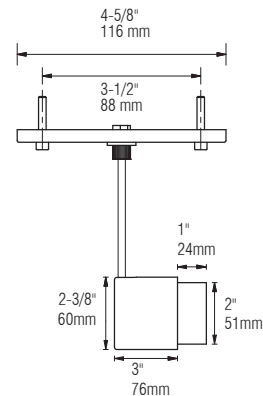


PHOTOMETRIC DATA:

13W, 3000K, 80+ CRI

Polar Candela Distribution

Illuminance at a Distance

Lumen: 700 lm (Spot Beam)



	Center Beam FC	Beam Width
3.0'	331	1.0' (305mm)
6.0'	82.9	2.0' (609mm)
9.0'	36.8	3.1' (945mm)
12.0'	20.7	4.1' (1250mm)
15.0'	13.3	5.1' (1554mm)
18.0'	9.21	6.1' (1859mm)


0° Spread: 19.4°

13W, 3000K, 80+ CRI

Polar Candela Distribution

Illuminance at a Distance

Lumen: 731 lm (Narrow Flood Beam)



	Center Beam FC	Beam Width
3.0'	206	1.6' (487mm)
6.0'	51.4	3.1' (945mm)
9.0'	22.8	4.7' (1432mm)
12'	12.8	6.3' (1920mm)
15'	8.22	7.9' (2407mm)
18'	5.71	9.4' (2865mm)

0° Spread: 29.4°

LED HALOGEN DIM GRAPH:

