




Vertical positioned

L713

- Application** Interior stair, ramp, aisle, and walkway illumination.
- IP** 50
- Mounting** Vertically or horizontally positioned face plate mounts to single gang box (not included). Optimal mounting distance is 18" - 24" (457mm - 610mm) AFF.
- Electrical** 1W, 350mA or 2.5W, 700mA LED.
- Power** 1.5 Watt (at 350 mA, 1.0 Watt)
- Consumption** 3.0 Watt (at 700mA, 2.5 Watt)
- Light Output** 1 Watt, 45~57lm
2.5 Watt, 92~103lm
*For photometric data, see page 02
- Warranty** 5 years limited warranty
Estimated useful life of LED is 50,000 hours.
- Material** Plated brass, anodized aluminum with tempered glass. RoHS compliant.
- Weight** 0.78lbs (0.353kg).
- Approval** 

Type:

Project:

Modified:

Quantity:

Notes:

Emergency Driver options (remote):

MP Lighting Emergency Backup Unit.
Input: 100-277V, 50/60Hz / Output: 11-36V, 16W

Bodine Emergency Micro Inverter
Input: 120/277V, 50/60Hz / Output: 120/277V, 60Hz, 20W

DISCLAIMER - Malfunction and damage to product due to improper dimming system installation or misuse will not be covered under warranty. Only DC Drivers are recommended for dimming systems. Consult MP Lighting for recommended drivers.


*MP Lighting reserves the right, at its sole discretion, at any time and without notice, to make design changes to any of our products.

Order Guide

Example: L713-1-W20S-S-V-A-MA

Code	Wattage	Color	Beam	Plate	Input Voltage	Finish
L713 -						
	1 = 1W 2 = 2.5W	W22S = 2200K, 80+CRI W27S = 2700K, 80+CRI W30S = 3000K, 80+CRI W35S = 3500K, 80+CRI W27H = 2000K, 90+CRI W30H = 3000K, 90+CRI W35H = 3500K, 90+CRI	S = spot (12°) N = narrow flood (30°) W = wide flood (120°)	V = vertical H = horizontal	D = DC	MA = matte clear anodized

Dimension:

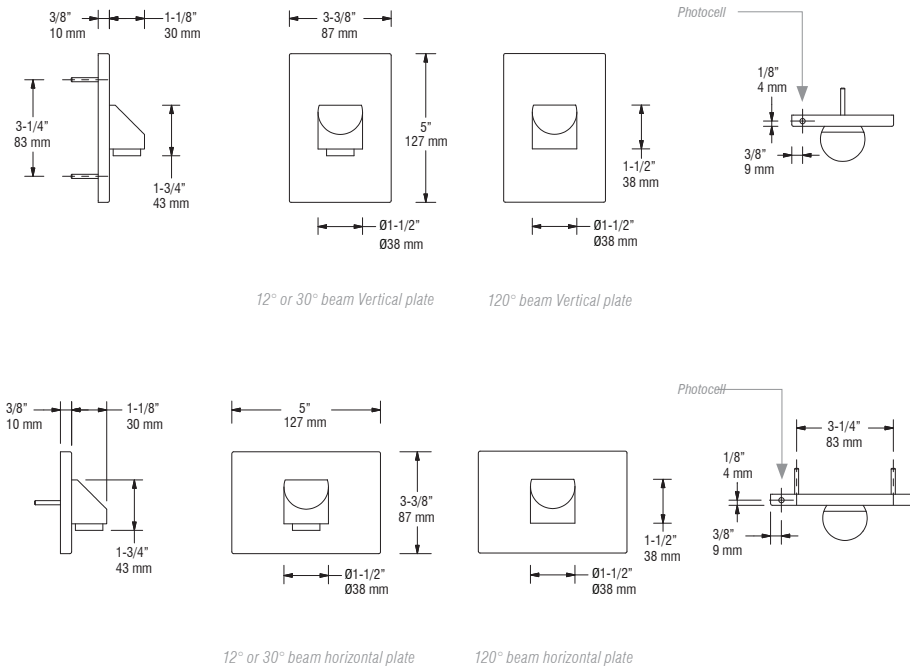

PHOTOMETRIC DATA:

1W, 3000K, horizontal plate

2.5W, 3000K, horizontal plate

Polar Candela Distribution





Isofootcandle Plot

Polar Candela Distribution

Isofootcandle Plot





Lumen: 53lm, Spot beam (12°)

Lumen: 101lm, Spot beam (12°)




Lumen: 45lm, Narrow flood (30°)

Lumen: 93lm, Narrow flood (30°)



Lumen: 57lm, Wide flood (120°)

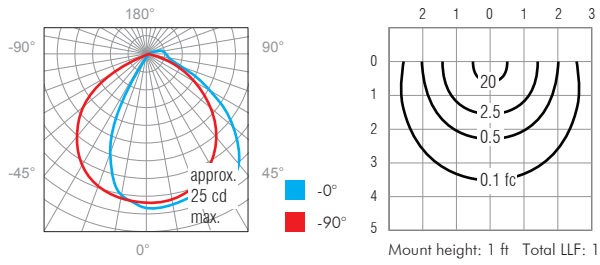

Lumen: 92lm, Wide flood (120°)

